




Bode Plot Machine Technical Data Sheets

Versions 1.0

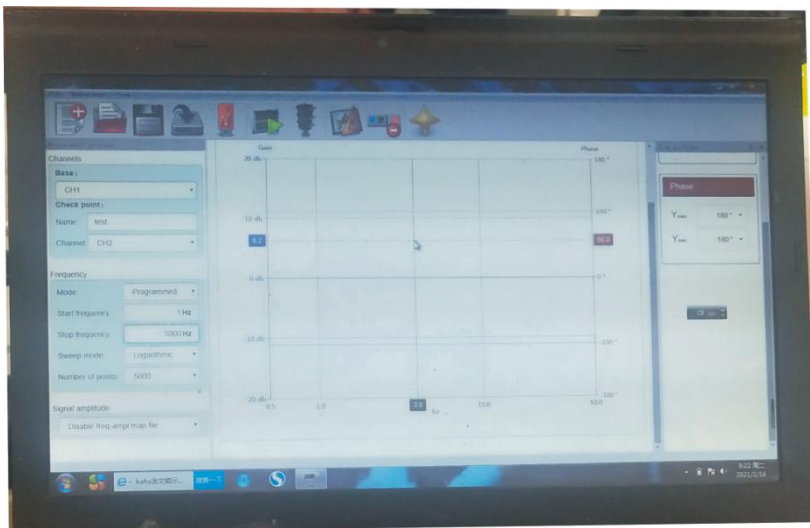

Part Number: STD-A100

Beijing Shangtongda Technology Co., Ltd.
Tel: +86-10-62565385
Fax: +86-10-62565265
Mail: bskang@std001.com
Website: www.std001.com



1. Signal Source (OUTPUT)

Waveform	Sinusoidal
Frequency range	0.1 Hz to 100KHz
Signal level range	-30 dBm to 13 dBm 0.007 V _{RMS} to 1 V _{RMS} (@ 50 Ω load)
Source level accuracy	± 0.3 dB (0.1 Hz to 100KHz)
Source level frequency response (flatness)	± 0.3 dB (typical, referring to 100 KHz)
Frequency accuracy after adjustment	± 2 ppm ± quantisation error (= 0.5 · step size)
Frequency stability	± 2 ppm (< 1 year after adjustment) ± 4 ppm (< 3 years after adjustment)
Frequency step size / resolution	0.00105 Hz (0.1 Hz to 100 KHz)
Source impedance	50 Ω
Return loss (1 Hz to 50 MHz)	> 30 dB, > 35 dB (typical)
Spurious signals & harmonics	< -55 dBc (typical)
Connector type	BNC

2. Inputs (CH1,CH2)

Input impedance (software switchable)	High: 1 MΩ ± 2% 40...55 pF Low: 50 Ω
Return loss @ 50 Ω input impedance	> 28 dB, > 35 dB typical
Receiver bandwidth - RBW (software selectable)	0.1 Hz, 3 Hz, 10 Hz, 30 Hz, 100 Hz, 300 Hz, 1 kHz, 3 kHz, 5 kHz
Noise floor (S21 measurement) RBW = 10 Hz, P _{SOURCE} = 13 dBm, Attenuator CH1: 20 dB, CH2: 0 dB	0.1 Hz to 10 kHz: -115 dB (typical) 10 kHz to 100 KHz: -125 dB (typical)
Input attenuators (software selectable)	0 dB, 10 dB, 20 dB, 30 dB, 40dB
Input sensitivity / range	100 mV _{RMS} full scale @ 0 dB input attenuator 10 V _{RMS} full scale @ 40 dB input attenuator
Input channels dynamic range	> 100 dB (@ 10 Hz RBW)
Gain error	< 0.1 dB (User-Range calibrated)
Phase error	< 0.5° (User-Range calibrated)
Connector type	BNC



3. USB Interface

Connector	Type B
-----------	--------

4. PC Requirements

Processor	Intel Core-i Dual-Core (or similar)
Memory (RAM)	2 GB, 4 GB recommended
Graphics resolution	Super VGA (1024 x 768) higher resolution recommended
Graphics card	DirectX 11 with Direct2D support
USB interface	USB 2.0 or higher
Operating system	Windows 7 SP1 or higher

5. Power Requirements

AC/DC power adapter

Input voltage / frequency	100...240 V / 47...63 Hz
---------------------------	--------------------------

DC power requirements

Supply voltage range / power	+9... 24 V / <5 W
Supply current	at 12 V: 180 mA (typical) at 18 V: 140 mA (typical) at 24 V: 90 mA (typical)
Low supply voltage shut-down	8.25 V (typical)
Power connector / socket	Coaxial power socket Inner diameter 2.5 mm Outer diameter 5.5 mm
Connector polarity	Inner connector ... positive Outer connector ... ground



6. Environmental Requirements

Temperature range	Storage	-35...+60 °C / -31...+140 °F
	Operating	+5...+40 °C / +41...+104 °F
	For specifications	23 °C ± 5 °C / 73 °F ± 18 °F
Relative humidity	Storage	20...90 %, non-condensing
	Operating	20...80 %, non-condensing

7. General

Dimensions (width × height × depth)	19.5 x 4.5 x 19.5 cm 7.76 x 1.77 x 7.48 inch
Weight	< 1 kg/2.2 lb
Weight - Accessories	< 1.5 kg/3.3 lb

8. Absolute Maximum Ratings (device will be destroyed)

DC supply voltage	+28 V
DC supply reverse voltage	-28 V
Maximum input signal at CH1 or CH2 (low impedance, 50 Ω)	1 W (= 7 V _{RMS}) 50 V _{RMS} 1 Hz to 100 KHz
Maximum AC input signal at CH1 or CH2 (high impedance, 1 MΩ)	
Maximum DC input signal at CH1 or CH2 (high impedance, 1 MΩ)	50 V
Maximum return power at the OUTPUT connector	0.5 W (= 5 V _{RMS})

Beijing Shangtongda Technology Co., Ltd.
Tel: +86-10-62565385
Fax: +86-10-62565265
Mail: bskang@std001.com
Website: www.std001.com